

North Ridge Trail



SCALE

| = 1000'

DISTANCE 5 MILES


DIFFICULTY

TYPE

Jamestown ↓

DISCOVER
JAMESTOWN
NORTH DAKOTA

TRAILHEAD

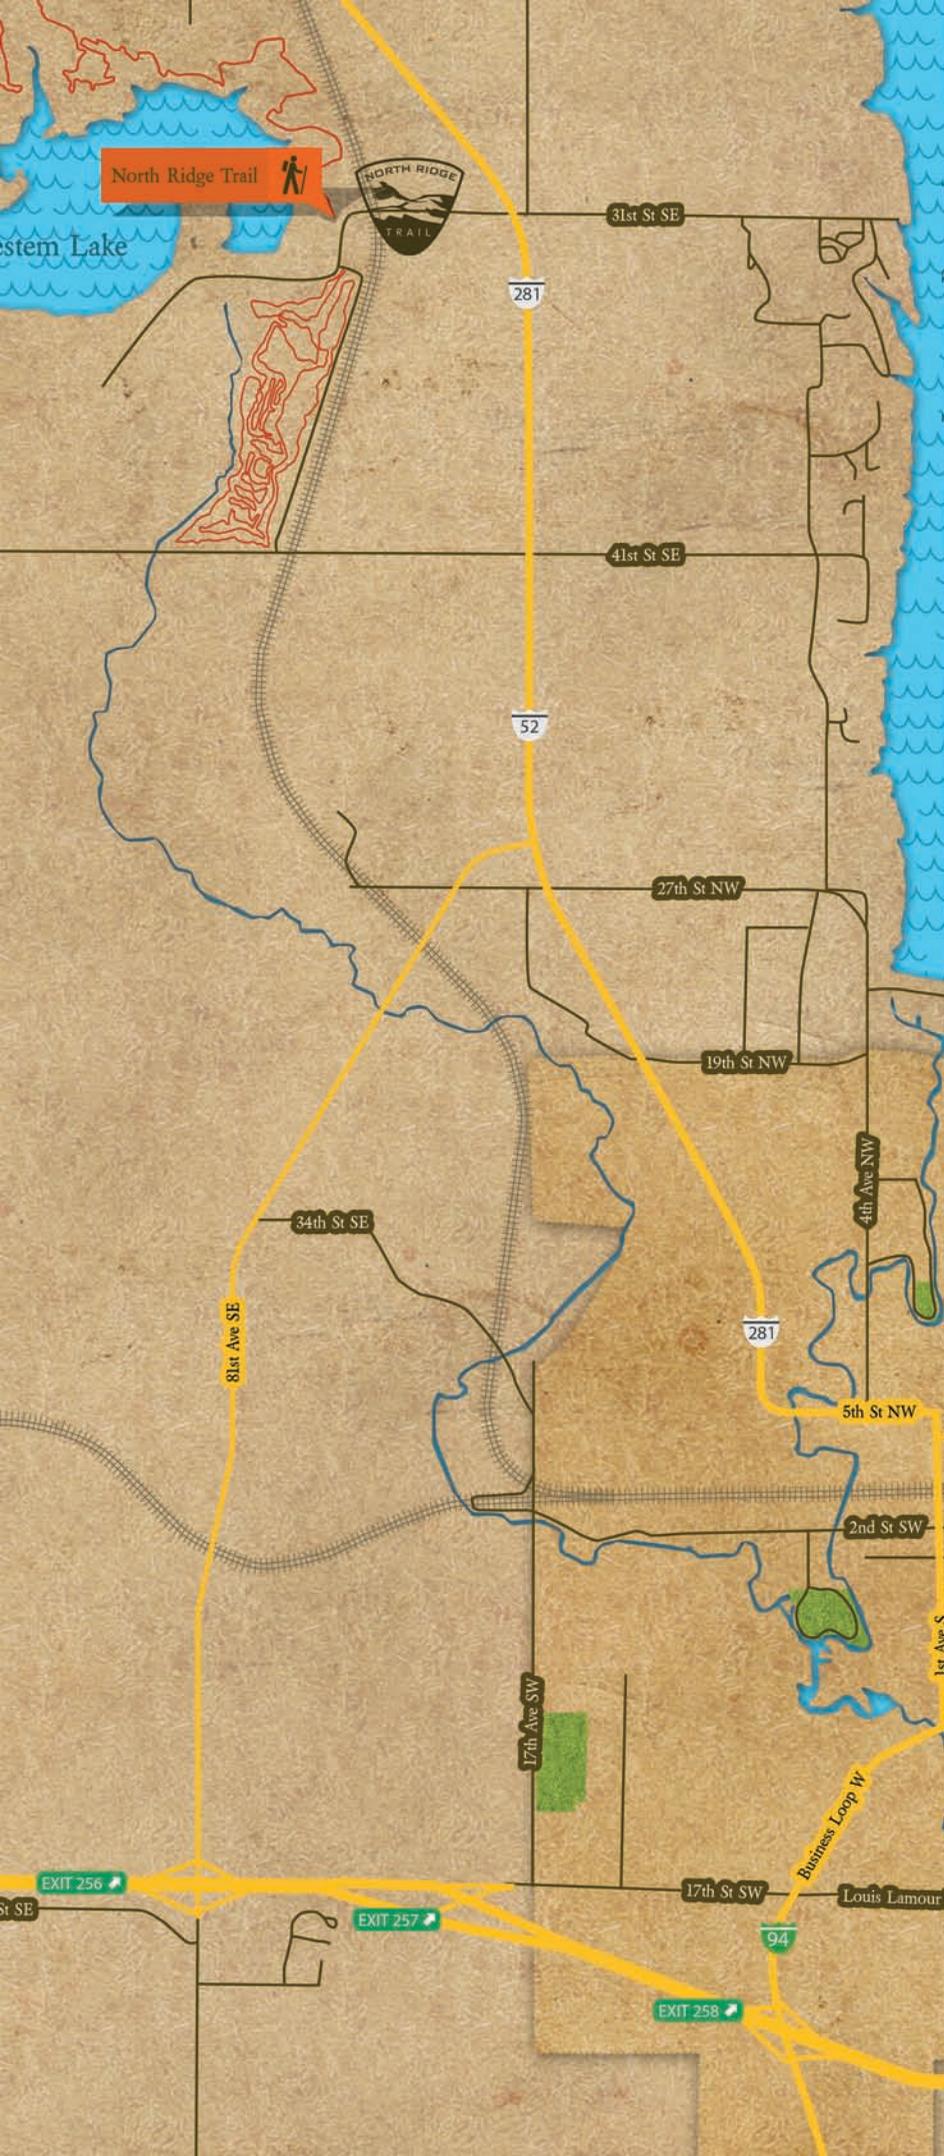

ADDRESS

Jamestown Tourism
404 Louis L'Amour Lane
Jamestown, ND 58401

PHONE

LOCAL 701-251-9145
TOLL FREE 800-222-4766

ONLINE

DiscoverJamestownND.com
guestinfo@DiscoverJamestownND.com

Overlook Trail



DISCOVER
JAMESTOWN
NORTH DAKOTA



ADDRESS


Jamestown Tourism
404 Louis L'Amour Lane
Jamestown, ND 58401

PHONE

LOCAL 701-251-9145
TOLL FREE 800-222-4766

ONLINE

DiscoverJamestownND.com
guestinfo@DiscoverJamestownND.com

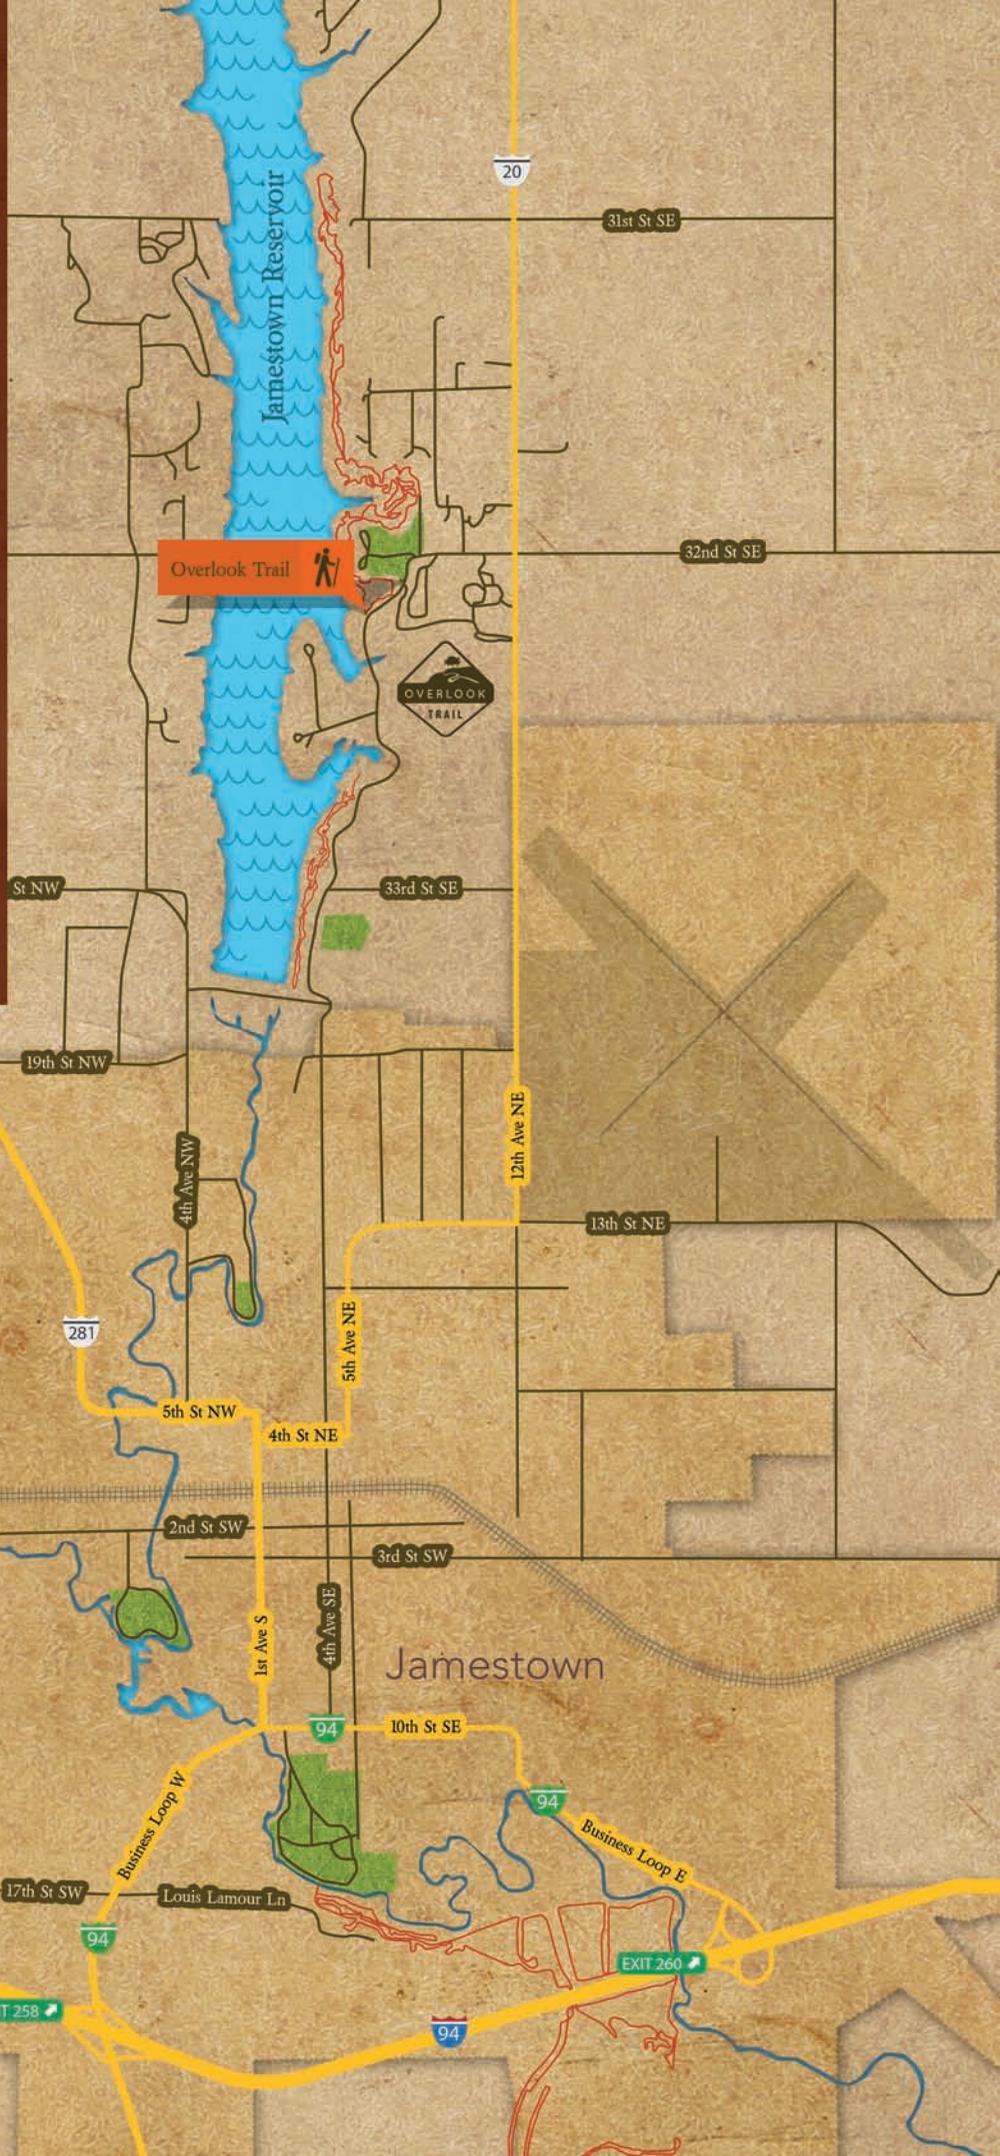

Pipestem Creek Trail



SCALE


1" = 500'

DISTANCE 8 MILES

DIFFICULTY Four red heart icons, indicating a moderate to difficult difficulty level.

TYPE Three icons representing trail types: a bicycle, a hiker, and a runner.



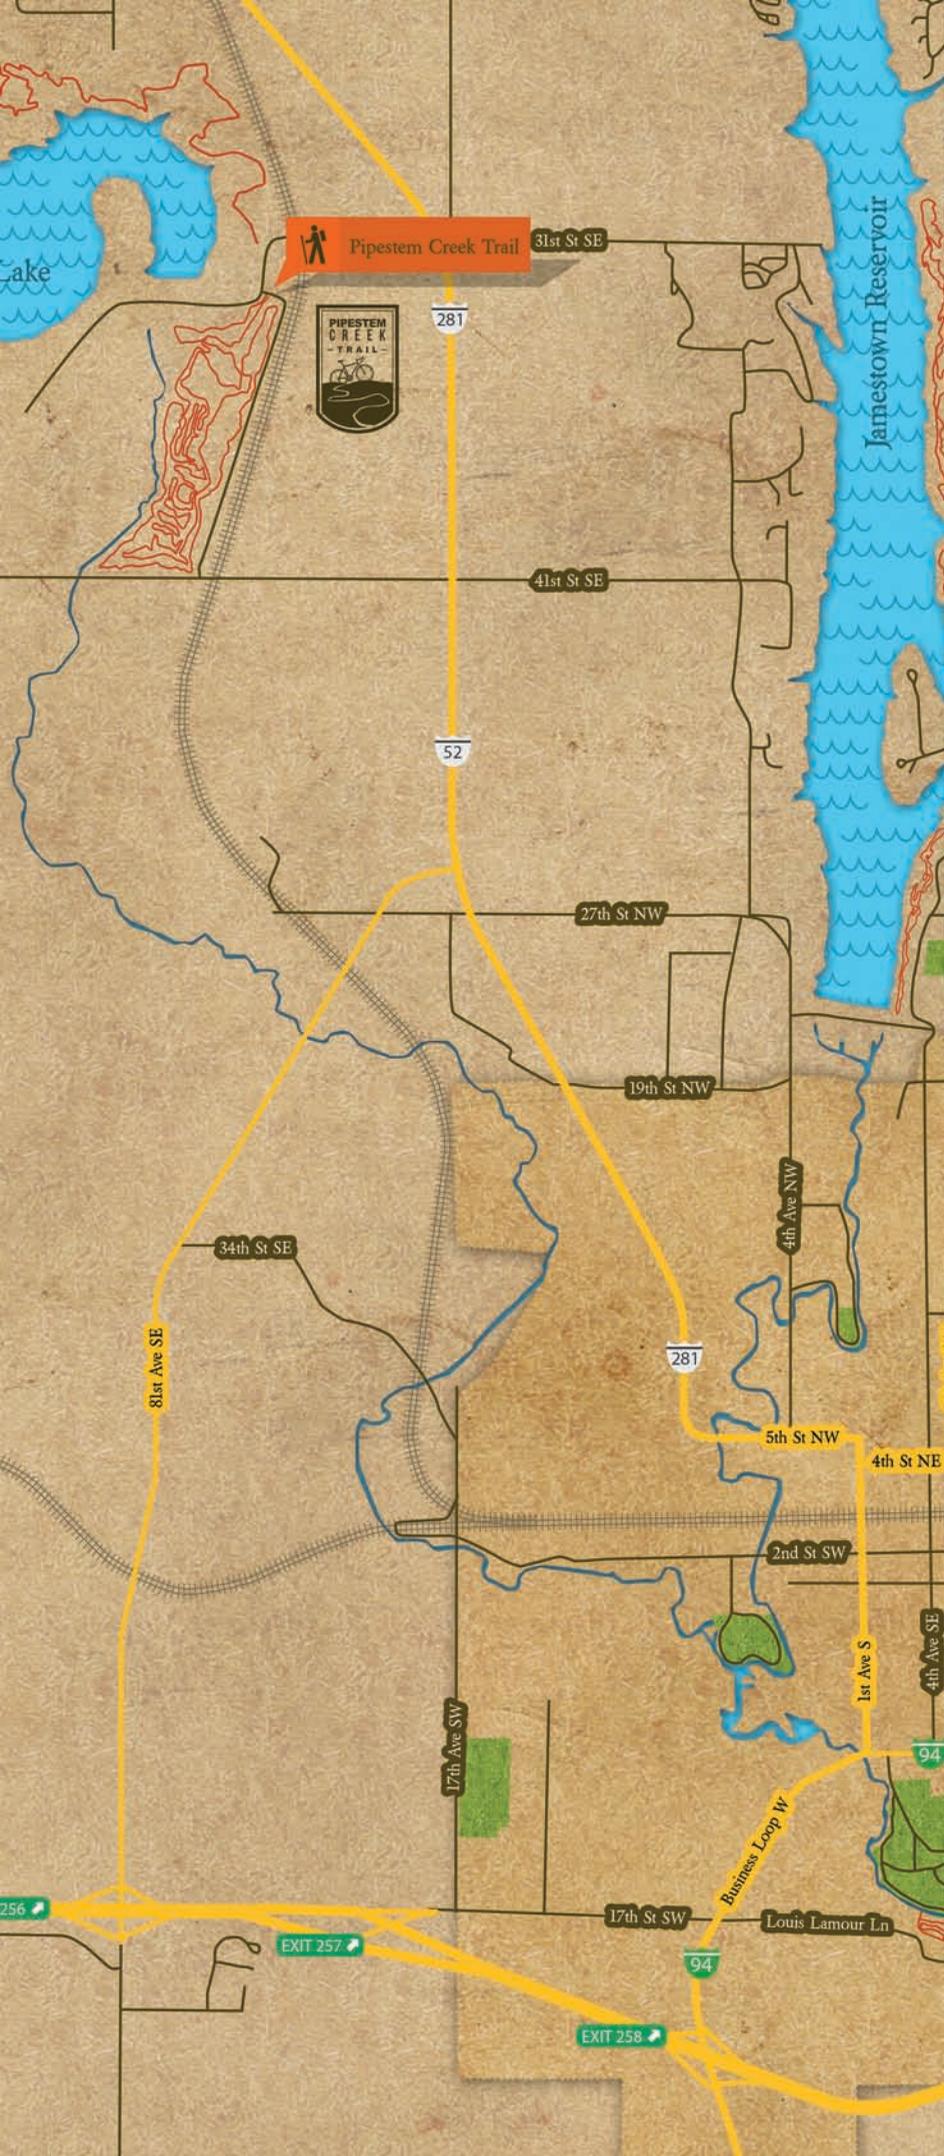

ADDRESS

Jamestown Tourism
404 Louis L'Amour Lane
Jamestown, ND 58401

PHONE

LOCAL 701-251-9145
TOLL FREE 800-222-4766

ONLINE

DiscoverJamestownND.com
guestinfo@DiscoverJamestownND.com

Split Rock Trail





ADDRESS


Jamestown Tourism
404 Louis L'Amour Lane
Jamestown, ND 58401

PHONE

LOCAL 701-251-9145
TOLL FREE 800-222-4766

ONLINE

DiscoverJamestownND.com
guestinfo@DiscoverJamestownND.com

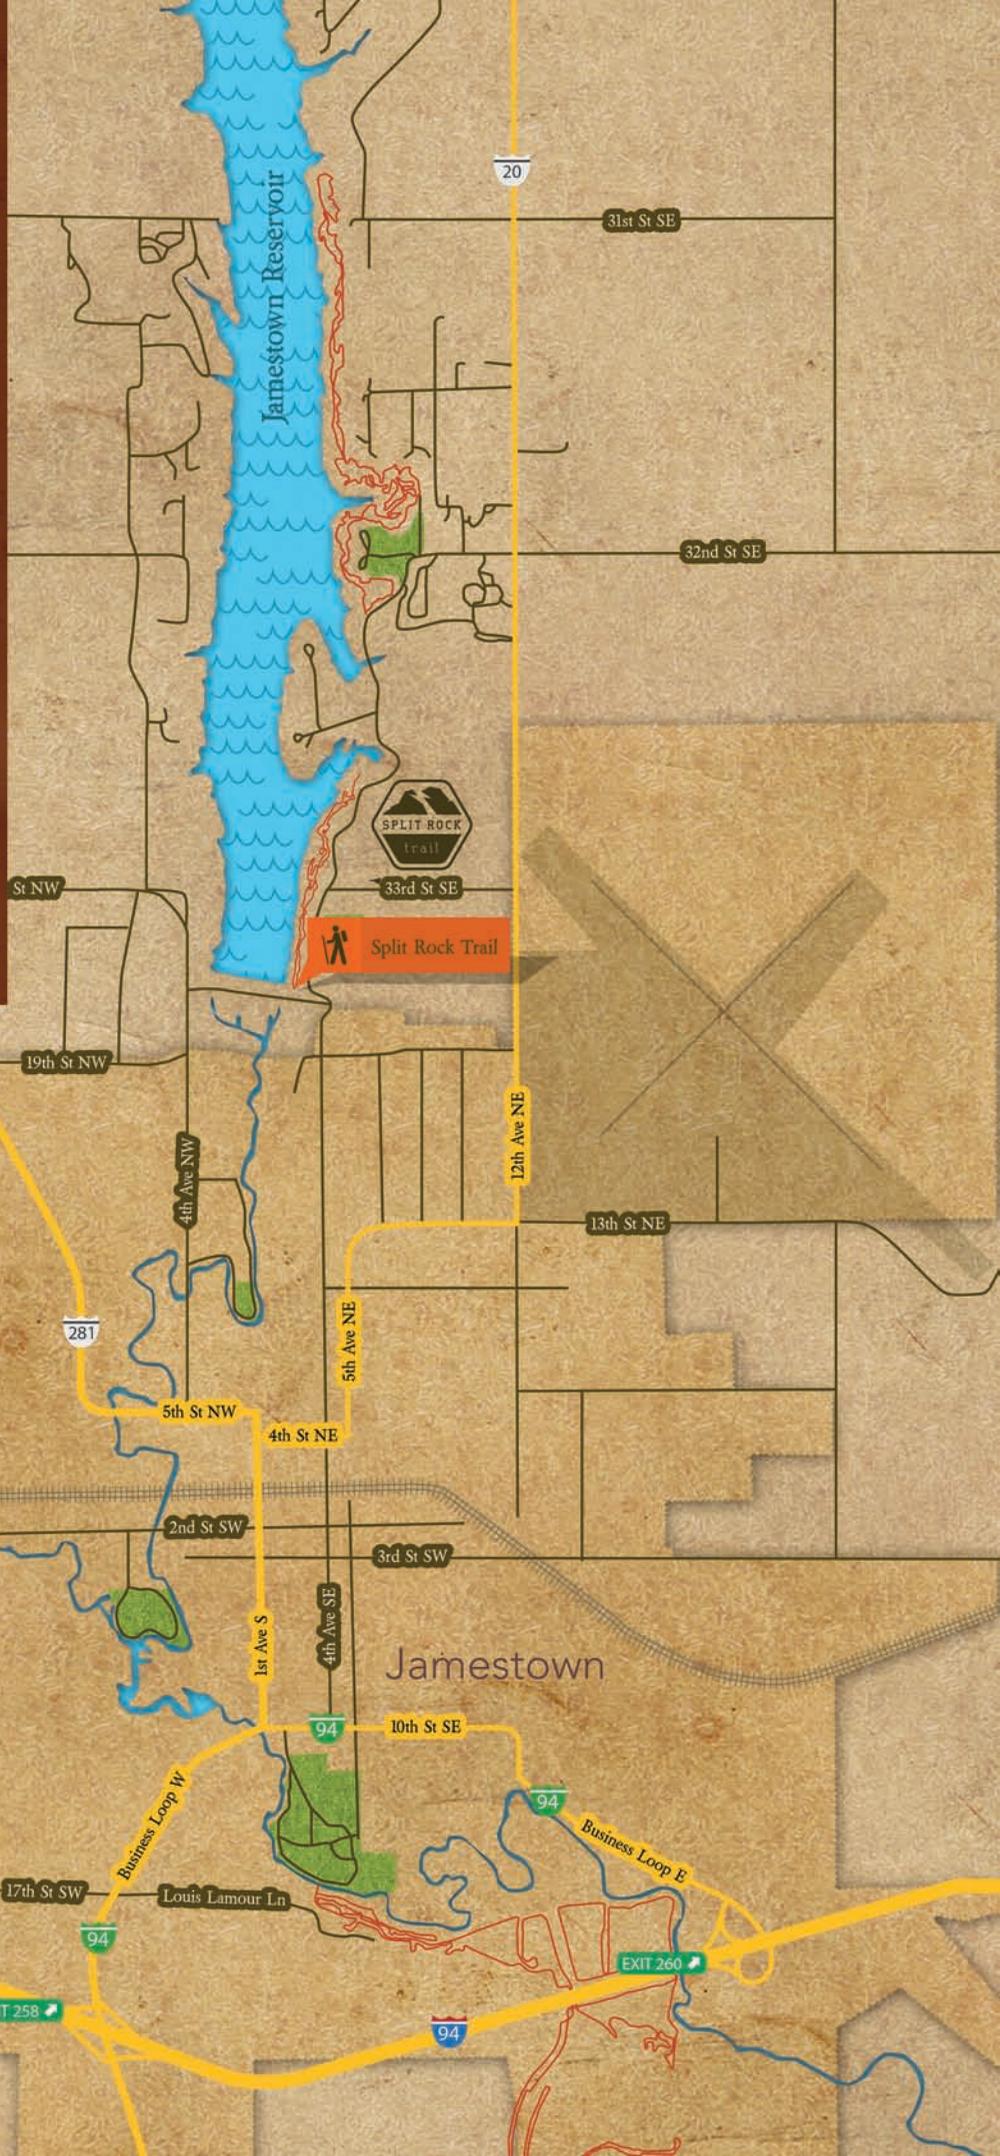

White Cloud Trail




SCALE  = 1000'

DISTANCE 10 MILES

DIFFICULTY 

TYPE 

DISCOVER
JAMESTOWN
NORTH DAKOTA

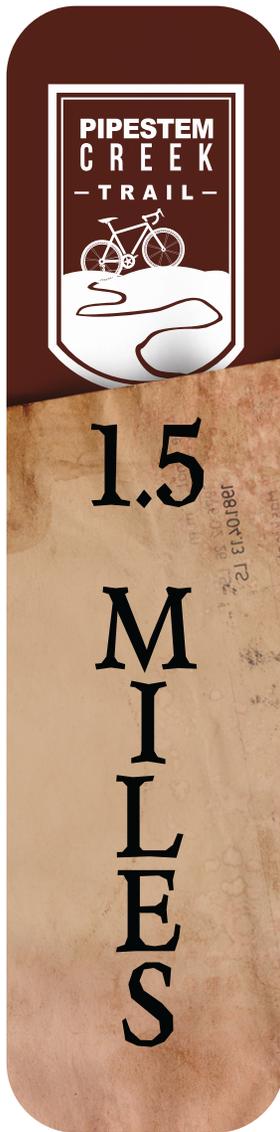

Client: JAMESTOWN TOURISM - PIPESTEM

Design: 6"X24"

Rep: Nathan Rathjen - JAMETOWN

Date / Version: 01/13/16-V1

Designer: Bryan Solinger

Copyright ©2016 Newman Outdoor Advertising Inc. Any use of this proposal without consent or compensation is strictly prohibited. Due to the Limitations of the printing process, The colors shown may not reflect actual colors.

Vinyl Banner Paper Banner ADH Vinyl
Other: _____ Size: _____

Approved by: _____



MOWER SPECIFICATIONS

ZT ELITE MODELS

KOHLER. 725cc

KOHLER. 747cc

| | | |
|-----------------------------------|---|--|
| Cutting Width | 4800/48" | 5400/54"; 6000/60" |
| Cutting Height | 1.5"–4" with Deck Height Control System | 1.5"–4" with Deck Height Control System |
| Blades | 4800/1/4" x 2 1/2" x 16 1/2" , High Lift, Heat Treated | 5400/1/4" x 2 1/2" x 18 3/4" , High Lift, Heat Treated 6000/1/4" x 2 1/2" x 20 1/2" , High Lift, Heat Treated |
| Lift and Height Adjustment | Instant Lift Electronic Actuator | Instant Lift Electronic Actuator |
| Blade Belt | Single V-Belt Spring Tension | Single V-Belt Spring Tension |
| Anti-Scalp Rollers | 4800/4 Total (2 On Front, 2 In Rear) | 5400/4 Total (2 Front, 2 Rear)/ 6000/6 Total (4 Front, 2 Rear) |
| Deck Flotation | Floats on 2 Chains & 2 Front Leveling Arms | Floats on 2 Chains & 2 Front Leveling Arms |
| Deck Thickness | 3/16" Thick Solid Steel | 3/16" Thick Solid Steel |
| ENGINE | | |
| Gross Horsepower | 725cc Air-Cooled Kohler Pro 7000 | 747cc Air-Cooled Kohler Pro 7000 |
| Cylinders | 90 Degree V-Twin | 90 Degree V-Twin |
| Displacement | 747 cc | 747 cc |
| Maximum Torque | 41.3 ft. lbs. @ 2400 RPM | 41.3 ft. lbs. @ 2400 RPM |
| Fuel Requirement | Unleaded Gasoline (87 Octane or higher) | Unleaded Gasoline (87 Octane or higher) |
| Fuel Capacity | 5.5 Gallons | 5.5 Gallons |
| Fuel Filter | Replaceable In-Line Filter | Replaceable In-Line Filter |
| Cooling System | Air-Cooled | Air-Cooled |
| Ignition | Electronic | Electronic |
| Starter | 12 Volt | 12 Volt |
| Charging System | 16 amp | 16 amp |
| DRIVE SYSTEM | | |
| Transmission | Dual Integrated Hydrostatic Transaxle | Dual Integrated Hydrostatic Transaxle |
| Pump Drive | Integrated Axial Piston Pump & Motor w/Gear Reduction | Integrated Axial Piston Pump & Motor w/Gear Reduction |
| Wheel Drive | Integrated with Commercial Grade Gear Reduction | Integrated with Commercial Grade Gear Reduction |
| Hydrostatic System Oil | 20W50 Motor Oil | 20W50 Motor Oil |
| Hydraulic Filter | 25 Micron, Replaceable Spin-On Type, 1 Per Axle | 25 Micron, Replaceable Spin-On Type, 1 Per Axle |
| Pumps (2) | 10cc Pump and Motor Integrated in one unit | 10cc Pump and Motor Integrated in one unit |
| Hydraulic Coolers (2) | 7" Cooling Fan per Unit | 7" Cooling Fan per Unit |
| Weight | 4800/804 lbs | 5400/831 lbs; 6000/858 lbs. |
| Overall Height | 46" | 46" |
| Overall Width | 4800/49 1/2" | 5400/55 1/2"; 6000/61 1/2" |
| Overall Length | 74 1/2" | 74 1/2" |
| Tire to Tire Width | 46" | 46" |
| Tires—Front | 13 x 6.5–6 Smooth Tread | 13 x 6.5–6 Smooth Tread |
| Tires—Rear | 22 x 11–10 Turf Tread | 22 x 11–10 Turf Tread |
| Steering | Dual Lever Steering, Independent Control | Dual Lever Steering, Independent Control |
| Turning Radius | Zero Degree, Turns Within Unit Length | Zero Degree, Turns Within Unit Length |
| Ground Speed (forward) | Up to 7 mph | Up to 7 mph |
| Parking Brake | Internal Parking Brake | Internal Parking Brake |

ANOTHER MODEL ON NEXT PAGE

SPECIFICATIONS ARE SUBJECT TO CHANGE.

We're constantly improving our products! For the latest videos, specifications, model improvements and information, please see us at www.badboymowers.com. Not responsible for typographical errors. ©2015. Bad Boy, Inc., All Rights Reserved.



MOWER SPECIFICATIONS

Kawasaki 726CC

| | |
|-----------------------------------|---|
| Cutting Width | 4800/48"; 5400/54"; 6000/60" |
| Cutting Height | 1.5"–4" with Deck Height Control System |
| Blades | 4800 /1/4" x 2 1/2" x 16 1/2", High Lift, Heat Treated 5400 /1/4" x 2 1/2" x 18 3/4", High Lift, Heat Treated 6000 /1/4" x 2 1/2" x 20 1/2", High Lift, Heat Treated |
| Lift and Height Adjustment | Instant Lift Electronic Actuator |
| Blade Belt | Single V-Belt Spring Tension |
| Anti-Scalp Rollers | 4800 /4 Total (2 On Front, 2 In Rear) 5400 /4 Total (2 Front, 2 Rear)/ 6000 /6 Total (4 Front, 2 Rear)Floats on 2 |
| Deck Flotation | Chains & 2 Front Leveling Arms |
| Deck Thickness | 3/16" Thick Solid Steel |
| ENGINE | |
| Gross Horsepower | 726cc Air-Cooled Kawasaki FR |
| Cylinders | 90 Degree V-Twin |
| Displacement | 726 cc |
| Maximum Torque | 40 ft. lbs. @ 2600 RPM |
| Fuel Requirement | Unleaded Gasoline (87 Octane or higher) |
| Fuel Capacity | 5.5 Gallons |
| Fuel Filter | Replaceable In-Line Filter |
| Cooling System | Air-Cooled |
| Ignition | Electronic |
| Starter | 12 Volt |
| Charging System | 20 amp |
| DRIVE SYSTEM | |
| Transmission | Dual Integrated Hydrostatic Transaxle |
| Pump Drive | Integrated Axial Piston Pump & Motor w/Gear Reduction |
| Wheel Drive | Integrated with Commercial Grade Gear Reduction |
| Hydrostatic System Oil | 20W50 Motor Oil |
| Hydraulic Filter | 25 Micron, Replaceable Spin-On Type, 1 Per Axle |
| Pumps (2) | 10cc Pump and Motor Integrated in one unit |
| Hydraulic Coolers (2) | 7" Cooling Fan per Unit |
| Weight | 4800 /804 lbs; 5400 /831 lbs; 6000 /858 lbs. |
| Overall Height | 46" |
| Overall Width | 4800 /49 1/2"; 5400 /55 1/2"; 6000 /61 1/2" |
| Overall Length | 74 1/2" |
| Tire to Tire Width | 46" |
| Tires—Front | 13 x 6.5–6 Smooth Tread |
| Tires—Rear | 22 x 11–10 Turf Tread |
| Steering | Dual Lever Steering, Independent Control |
| Turning Radius | Zero Degree, Turns Within Unit Length |
| Ground Speed (forward) | Up to 7 mph |
| Parking Brake | Internal Parking Brake |

SPECIFICATIONS ARE SUBJECT TO CHANGE.

We're constantly improving our products! For the latest videos, specifications, model improvements and information, please see us at www.badboymowers.com. Not responsible for typographical errors. ©2015. Bad Boy, Inc., All Rights Reserved.

FIXIT



Today's Service Station

The Fixit includes all the tools necessary to perform basic bike repairs and maintenance, from changing a flat to adjusting brakes and derailleurs. The tools and air pump are securely attached to the stand with stainless steel cables and tamper-proof fasteners. Hanging the bike from the hanger arms allows the pedals and wheels to spin freely while making adjustments.

Patent D680,9145



DERO
A PLAYCORE Company

FIXIT

Hanger arms accommodate most types of bikes

QR code takes smart phone users to comprehensive bike repair web site

Large surface area for sponsorship, branding, or way-finding signage

Tools are secured with braided stainless steel aircraft cables

Pump hose is reinforced for maximum protection

Pump holster can be mounted on either side or back of Fixit

Hanger and pump (shipped as 2nd package) pack inside main body for easy, inexpensive shipping

Hanger arms can be mounted at 12, 3, 6, or 9 o'clock

Hanger is ADA compliant

Includes most commonly used tools for simple bike maintenance

Screwdrivers and Allen Wrenches are on swivel connectors for easier use

Universal pump head accommodates all valve stem types

Tools included:
 Philips and flat head screwdrivers
 2.5, 3, 4, 5, 6, 8mm Allen wrenches
 Headset wrench
 Pedal wrench
 8, 9, 10, 11mm box wrenches
 Tire levers (2)

FINISH OPTIONS

Galvanized



Stainless



Powder Coat



Thermoplastic





DERO
A PLAYCORE Company

504 Malcolm Ave SE Suite 100,
MINNEAPOLIS, MN, 55414
Tax Registration No 26-303-0026
www.dero.com
(612) 359-0689 * (888) 337-6729

Sales Representative - Siri Preston

Contact Name Searle Swedlund
Contact Phone

Est. Ship Date 2/3/2016
Delivery terms FOB origin
Payment terms CC

Delivery Contact
Delivery Phone

Quotation

Page 1 of 1
Number QTE-00000634-1
Date 1/13/2016
Customer PO
Reference Fixit w/ Air Kit 2
Quote valid until 2/12/2016

Sold to:

Jamestown Tourism Department
PO Box 917
JAMESTOWN, ND 58402
USA

Ship to:

Jamestown Tourism Department
JAMESTOWN, ND 58402
USA

| Catalog No | Description | Ship date | Quantity | Unit | Net Unit | Amount |
|--------------------|------------------------------|-----------|----------|------|----------|--------|
| FIXIT-H | FIXIT-H | 2/3/2016 | 1.00 | EA | 691.000 | 691.00 |
| AIR KIT 2 FIXIT-B | AIR KIT 2 FIXIT-B | 2/3/2016 | 1.00 | EA | 392.000 | 392.00 |
| PUMP STOP C | Surface Mount Galvanized | 2/3/2016 | 1.00 | EA | 95.000 | 95.00 |
| Penta-Nut-Tool 3/8 | Penta Nut Tool - 1GPNS37-HEX | 2/3/2016 | 1.00 | EA | 0.000 | 0.00 |

Lead Time: 3 Weeks

*Pricing is good for either galvanized or powder coat finish

To place the order, verify that all the bill-to, ship-to, and order information is correct, sign and date where indicated, and email back to your sales representative, or to sales@dero.com. Once we receive a signed order form, we will e-mail you an order confirmation, so that you know that your order has been processed, and provide an estimated ship date.

This Ship Date is an estimate only. We will do everything possible to ship by or before that date but do not guarantee shipment by that date.

A 20% restocking fee will be assessed to all canceled orders.

Quote is good for 30 days.

Customer agrees that installation area is suitable for drilling.

Sales tax is estimated based on current tax rates. Final sales tax is subject to tax rates at the time of shipment.

Payments can be made by credit card, pre-payment, or net 30 credit terms may be issued with credit approval.

THIS SIGNED ORDER FORM IS ACCEPTED AS A BINDING PURCHASE

Customer please specify desired ship date: _____

Signature & Date _____

| Sales Subtotals | Freight | Other Charges | Sales Tax |
|-----------------|---------|---------------|-----------|
| 1,178.00 | 38.00 | 0.00 | 60.80 |

| | | |
|--------------|------------|-------------------|
| TOTAL | USD | \$1,276.80 |
|--------------|------------|-------------------|



January 2016

Mr. Stankiewicz:

Jamestown Tourism is happy to be a partner in the 2017 Recreational Trail Program grant application process with Jamestown Parks and Rec.

At our January 22, 2016 board meeting, the Jamestown Tourism board agreed to provide the required 20% funding for the Jamestown Park and Rec Recreational Trail Program grant request.


Should you have any questions, please feel free to contact us.

Sincerely,

A handwritten signature in dark ink that reads "Searle Swedlund".

Searle Swedlund

Executive Director

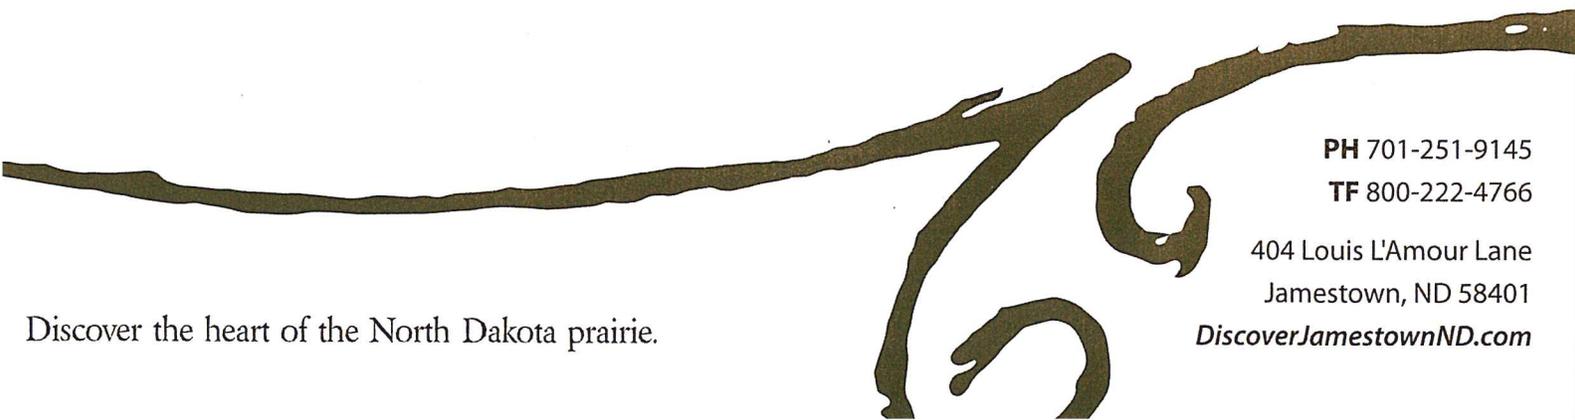A large, dark brown, stylized graphic of a branch or vine that curves across the bottom of the page.

PH 701-251-9145

TF 800-222-4766

404 Louis L'Amour Lane
Jamestown, ND 58401

DiscoverJamestownND.com

Discover the heart of the North Dakota prairie.